



Home

Grigio

Noce

Oro

Technical

Packaging

Merchandising

Contact

grigio

[Click Here for More Information](#)



18"x18" - 12"x12"



Mosaic - Square 2"x2"
12"x12"



[Home](#)

[Grigio](#)

[Noce](#)

[Oro](#)

[Technical](#)

[Packaging](#)

[Merchandising](#)

[Contact](#)

grigio

18"x18" - 3"x12" Bullnose

livigno™ grigio

glazed ceramic tile



ULDE Grigio
18"x18"



ULDB Grigio
12"x12"



ULDH Grigio
Mosaic - Square 2x2"
12"x12"

Trims Available



ULDL Grigio
3"x12" Bullnose

Home

Grigio

Noce

Oro

Technical

Packaging

Merchandising

Contact

noce

[Click Here for More Information](#)



18"x18" - 12"x12"



Mosaic - Square 2"x2"
12"x12"



[Home](#)

[Grigio](#)

[Noce](#)

[Oro](#)

[Technical](#)

[Packaging](#)

[Merchandising](#)

[Contact](#)

noce

18"x18" - 12"x12" Mosaic Square 2"x2" - 3"x12" Bullnose

livigno™ noce

glazed ceramic tile



ULDF Noce
18"x18"



ULDC Noce
12"x12"



ULDJ Noce
Mosaic - Square 2x2"
12"x12"

Trims Available



ULDM Noce
3"x12" Bullnose

Home

Grigio

Noce

Oro

Technical

Packaging

Merchandising

Contact

oro

[Click Here for More Information](#)



18"x18" - 12"x12"



Mosaic - Square 2"x2"
12"x12"



[Home](#)

[Grigio](#)

[Noce](#)

[Oro](#)

[Technical](#)

[Packaging](#)

[Merchandising](#)

[Contact](#)

oro

12"x12" - 3"x12" Bullnose

livigno™ oro

glazed ceramic tile



ULDD Oro
18"x18"



ULDA Oro
12"x12"



ULDG Oro
Mosaic - Square 2x2"
12"x12"

Trims Available



ULDK Oro
3"x12" Bullnose

Home

Grigio

Noce

Oro

Technical

Packaging


Merchandising


Contact

livigno™ testing/packaging

glazed ceramic tile

packaging

	Sizes	Pcs	Sq. Ft.	Weight (lbs.)	Thickness
Floor Tile	12" x 12"	15	14.53	50	0.315
Floor Tile	18" x 18"	8	17.44	66	0.354
Mosaic - Square 2"x2"	12" x 12"	10	9.69	39	Compatible
Bullnose	3" x 12"	20		21	Compatible

	Sizes	Ctn	Sq. Ft.	Weight (lbs.)
Floor Tile	12" x 12"	48	697.44	2400
Floor Tile	18" x 18"	32	558.08	2156

technical

ASTM Test Results

Technical Characteristics	ASTM Standards	ASTM Test Results	ASTM Test Methods
Water Absorption	3.0% - 7.0%	2.0% - 5.0%	C373
Frost Resistance	As Reported	Resistant	C1026
Scratch Resistance	MOHS 1-10	6.5	MOHS Scale
Breaking Strength	≥ 250 lbf.	≥ 385 lbf.	C648
Facial Dimension	+/- 3.0% From Nominal	Within Standard	C499
Thickness	≤ 0.04 in (1.02 mm max)	Within Standard	C499
Wedging (squareness)	+/- 0.50% or +/- 2.0 mm**	Within Standard	C502
Warpage (flatness)	+/- 0.75% or +/- 2.0 mm**	Within Standard	C485
Abrasion Resistance	Class 0 - Class V	Class IV	C1027
DCOF-Dynamic Coefficient of Friction (Wet Areas Only)*	As Reported	Less than 0.42	DCOF AcuTest SM *
Chemical Resistance	Class A - Class E	Class A	C650
Stain Resistance	Class A - Class E	Class A	C1378

*Dynamic Coefficient of Friction (DCOF) - Water, oil, grease or other fluids create slippery conditions. When installing floors in areas with exposure to these conditions, a minimum D.C.O.F. value of 0.42 is required. Additionally, extra caution is required with regards to product selection and proper maintenance. Visit www.tcnatile.com for complete information regarding the DCOF Acutest test method and values.

*DCOF AcuTest is the industry designation for the test procedure contained in ANSI A137.1 Section 9.6, which has been extensively researched, allows for in-situ field measurements, and is in use at tile manufacturing facilities. It was so named to distinguish it from other DCOF measurements using different instruments and/or protocols.

** Whichever is less

Home

Grigio

Noce

Oro

Technical

Packaging

Merchandising

Contact




Contributes to LEED Credits

livigno™ merchandising


glazed ceramic tile

Product Overview

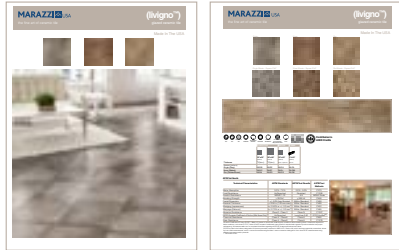

Description: Livigno™ Product Overview
Size: 8½" x 11"

Brochure



Description: Z948 Livigno™ Brochure
Size: 8½" x 11"

Illustrated Sample Boards



Description: Z534 Livigno™
Illustrated Sample Board
Size: 25" x 25"

Home

Grigio

Noce

Oro

Technical

Packaging

Merchandising

Contact



American Marazzi Tile, Inc.
Headquarters & Manufacturing Plant

Telephone
972.226.0110
Fax
972.226.5629

359 Clay Road East
Sunnyvale, Texas 75182

www.marazzitile.com
contact@marazzitile.com

[Home](#)

[Grigio](#)

[Noce](#)

[Oro](#)

[Technical](#)

[Packaging](#)

[Merchandising](#)

[Contact](#)

Color and other aesthetic features shown are as close as the limitation of the printing process will allow. We have tried to make this brochure as comprehensive and factual as possible. We reserve the right, however, to make changes at any time, without notice, in colors, materials, packaging, specifications and availability. Since some information may have been updated since time of printing, please check with American Marazzi Tile Customer Service for details.