


**MARAZZI**  USA

the fine art of porcelain stoneware


**(walnut canyon)**

color body porcelain stoneware

Made In The USA



Made In The USA

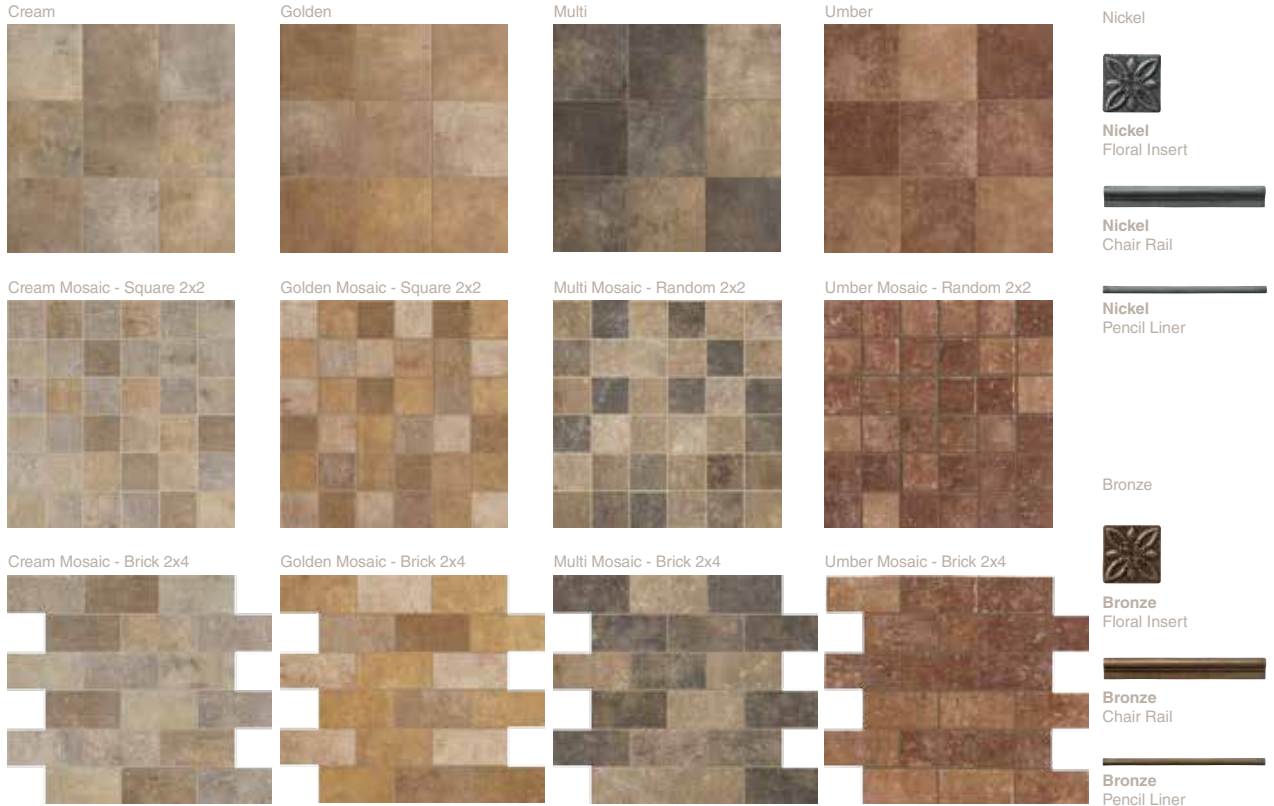

Contributes to LEED Credits

Made in the USA

	MODULAR TILE			FLOOR TILE		DECOS			TRIMS*					
Thickness	6 1/2" x 6 1/2" (16.5 x 16.5 cm) 5/16" (8.5mm)	13" x 13" (33.3 x 33.3 cm) 5/16" (8.5mm)	20" x 20" (50 x 50 cm) 7/16" (11mm)	13" x 13" (33.3 x 33.3 cm) Mosaic - Square 2"x2"	13" x 13" (33.3 x 33.3 cm) Mosaic - Brick 2"x4"	1" x 1" (2.5 x 2.5 cm) Floral Insert	2" x 2" (5 x 5 cm) Floral Insert	4" x 4" (10 x 10 cm) Floral Insert	6" x 13" (15 x 33.3 cm) Sanitary Cove Base**	1" x 6" (2.5 x 15 cm) Sanitary Cove Base In Angle**	1" x 6" (2.5 x 15 cm) Sanitary Cove Base Out Angle**	1/2" x 13" (1.25 x 33.3 cm) Pencil Liner	2" x 13" (5 x 33.3 cm) Sink Rail**	3" x 13" (8 x 33.3 cm) Bulnose
Names (colors)	UJ3W	UJ3U	UJ3V	UJ34	UJ35				UJ3Z	UJ32	UJ33			UJ3Y
Cream (cream)	UHDQ	UHC3	UHC6	UHD4	UHD7				UHDZ	UJ2B	UJ2E			UHDW
Golden (gold)	UHDR	UHC4	UHC7	UHD5	UHD8				UHD2	UJ2C	UJ2F			UHDX
Multi (multi color)	UHDP	UHC2	UHC5	UHD3	UHD6				UHDY	UJ2A	UJ2D			UHDV
Umber (red/brown)						UJ6Y	UJ6W	UJ6U				UJ6Q	UJ6N	
Nickel						UJ6Z	UJ6X	UJ6V				UJ6R	UJ6P	
Bronze														

Notes: \* Trim is available in all colors and made to complement Modular and Floor Tile. \*\* Suggested for interior applications only.

### ASTM Test Results

Technical Characteristics	ASTM Standards	ASTM Test Results	ASTM Test Methods
Water Absorption	≤ 0.50%	≤ 0.50%	C373
Frost Resistance	As Reported	Resistant	C1026
Scratch Resistance	MOHS 1-10	7	MOHS Scale
Breaking Strength	≥ 250 lbf.	≥ 429 lbf.	C648
Facial Dimension	-3.0% < Nominal ≤ 2.0%	Within Standard	C499
Thickness	≤ 0.04 in (1.02 mm max)	Within Standard	C499
Wedging (squareness)	+/- 0.50% or +/- 2.0 mm**	Within Standard	C502
Warpage (flatness)	+/- 0.75% or +/- 2.3 mm**	Within Standard	C485
Abrasion Resistance	Class 0 - Class V	Class IV	C1027
DCOF-Dynamic Coefficient of Friction (Wet Areas Only)†	As Reported	Minimum 0.42	DCOF AcuTest™**
SCOF-Static Coefficient of Friction (Dry)	As Reported	0.70 ≤ C.O.F. < 0.80	C1028
SCOF-Static Coefficient of Friction (Wet)	As Reported	0.60 ≤ C.O.F. < 0.70	C1028
Chemical Resistance	Class A - Class E	Class A	C650
Stain Resistance	Class A - Class E	Class A	C1378

†Dynamic Coefficient of Friction (DCOF) - Water, oil, grease or other fluids create slippery conditions. When installing floors in areas with exposure to these conditions, a minimum D.C.O.F. value of 0.42 is required. Additionally, extra caution is required with regards to product selection and proper maintenance. Visit [www.tcnatile.com](http://www.tcnatile.com) for complete information regarding the DCOF AcuTest method and values.  
 \*\*DCOF AcuTest is the industry designation for the test procedure contained in ANSI A137.1 Section 9.6, which has been extensively researched, allows for in-situ field measurements, and is in use at tile manufacturing facilities. It was so named to distinguish it from other DCOF measurements using different instruments and/or protocols.  
 \*\* Whichever is less

